





HM



PRIMARY REACTANCE

R.F. AMPLIFICATION SELECTOR
1 STAGE A.F. 2 STAGES A.F.

SELECTIVITY

Hebroni
REPAIRS & TELEPHONE CO.
WASHINGTON, D.C.
1937-38

TUNING SYSTEM LOOP ANTENNA

SECONDARY GATE CONTROL

R.F. AMPLIFICATION SELECTOR

R.F. AMPLIFICATION SELECTOR

RF A.F. TUNER

RF A.F. TUNER



PRIMARY INDUCTANCE

R.F. AMPLIFICATION SELECTOR
1 STAGE R.F. 3 STAGES R.F.

SELECTIVITY

Federal
TELEPHONE & TELEGRAPH CO.
BUFFALO, N.Y. U.S.A.
TYPE 61

TUNING SYSTEM LOOP
ANTENNA

A.F. AMPLIFICATION SELECTOR

SECONDARY WAVE FILTER

R.F. AMPLIFICATION CONTROL

DET. R.F. RHEO.

DET. A.F. RHEO.

DET. RHEO.

DET. A.F. RHEO.

PHONE

PHONE





3-6











PHILCO



BAND SELECTOR

PIC

ATTENUATOR

MAX

MAX

OFF ON

VOLUME





LIFETIME





Predicta





3C2



10

SONO-DATA





MODEL
1230



MOD.
UNMOD.



MIN.

MAX.

GND.

F
E
D
C
B
A

BAND SELECTOR

OFF ON

PORTA-POW

USE ON 110-120 V., 60-60 CYCLES 0
OUTPUT, 90 V. AT 0.125 AMPS.
1.4 V. AT 300 AMPS. - MODEL U-1

GENERAL TRANSFORMER CORPORATION
CHICAGO, ILL.



PHILCO




PHILCO









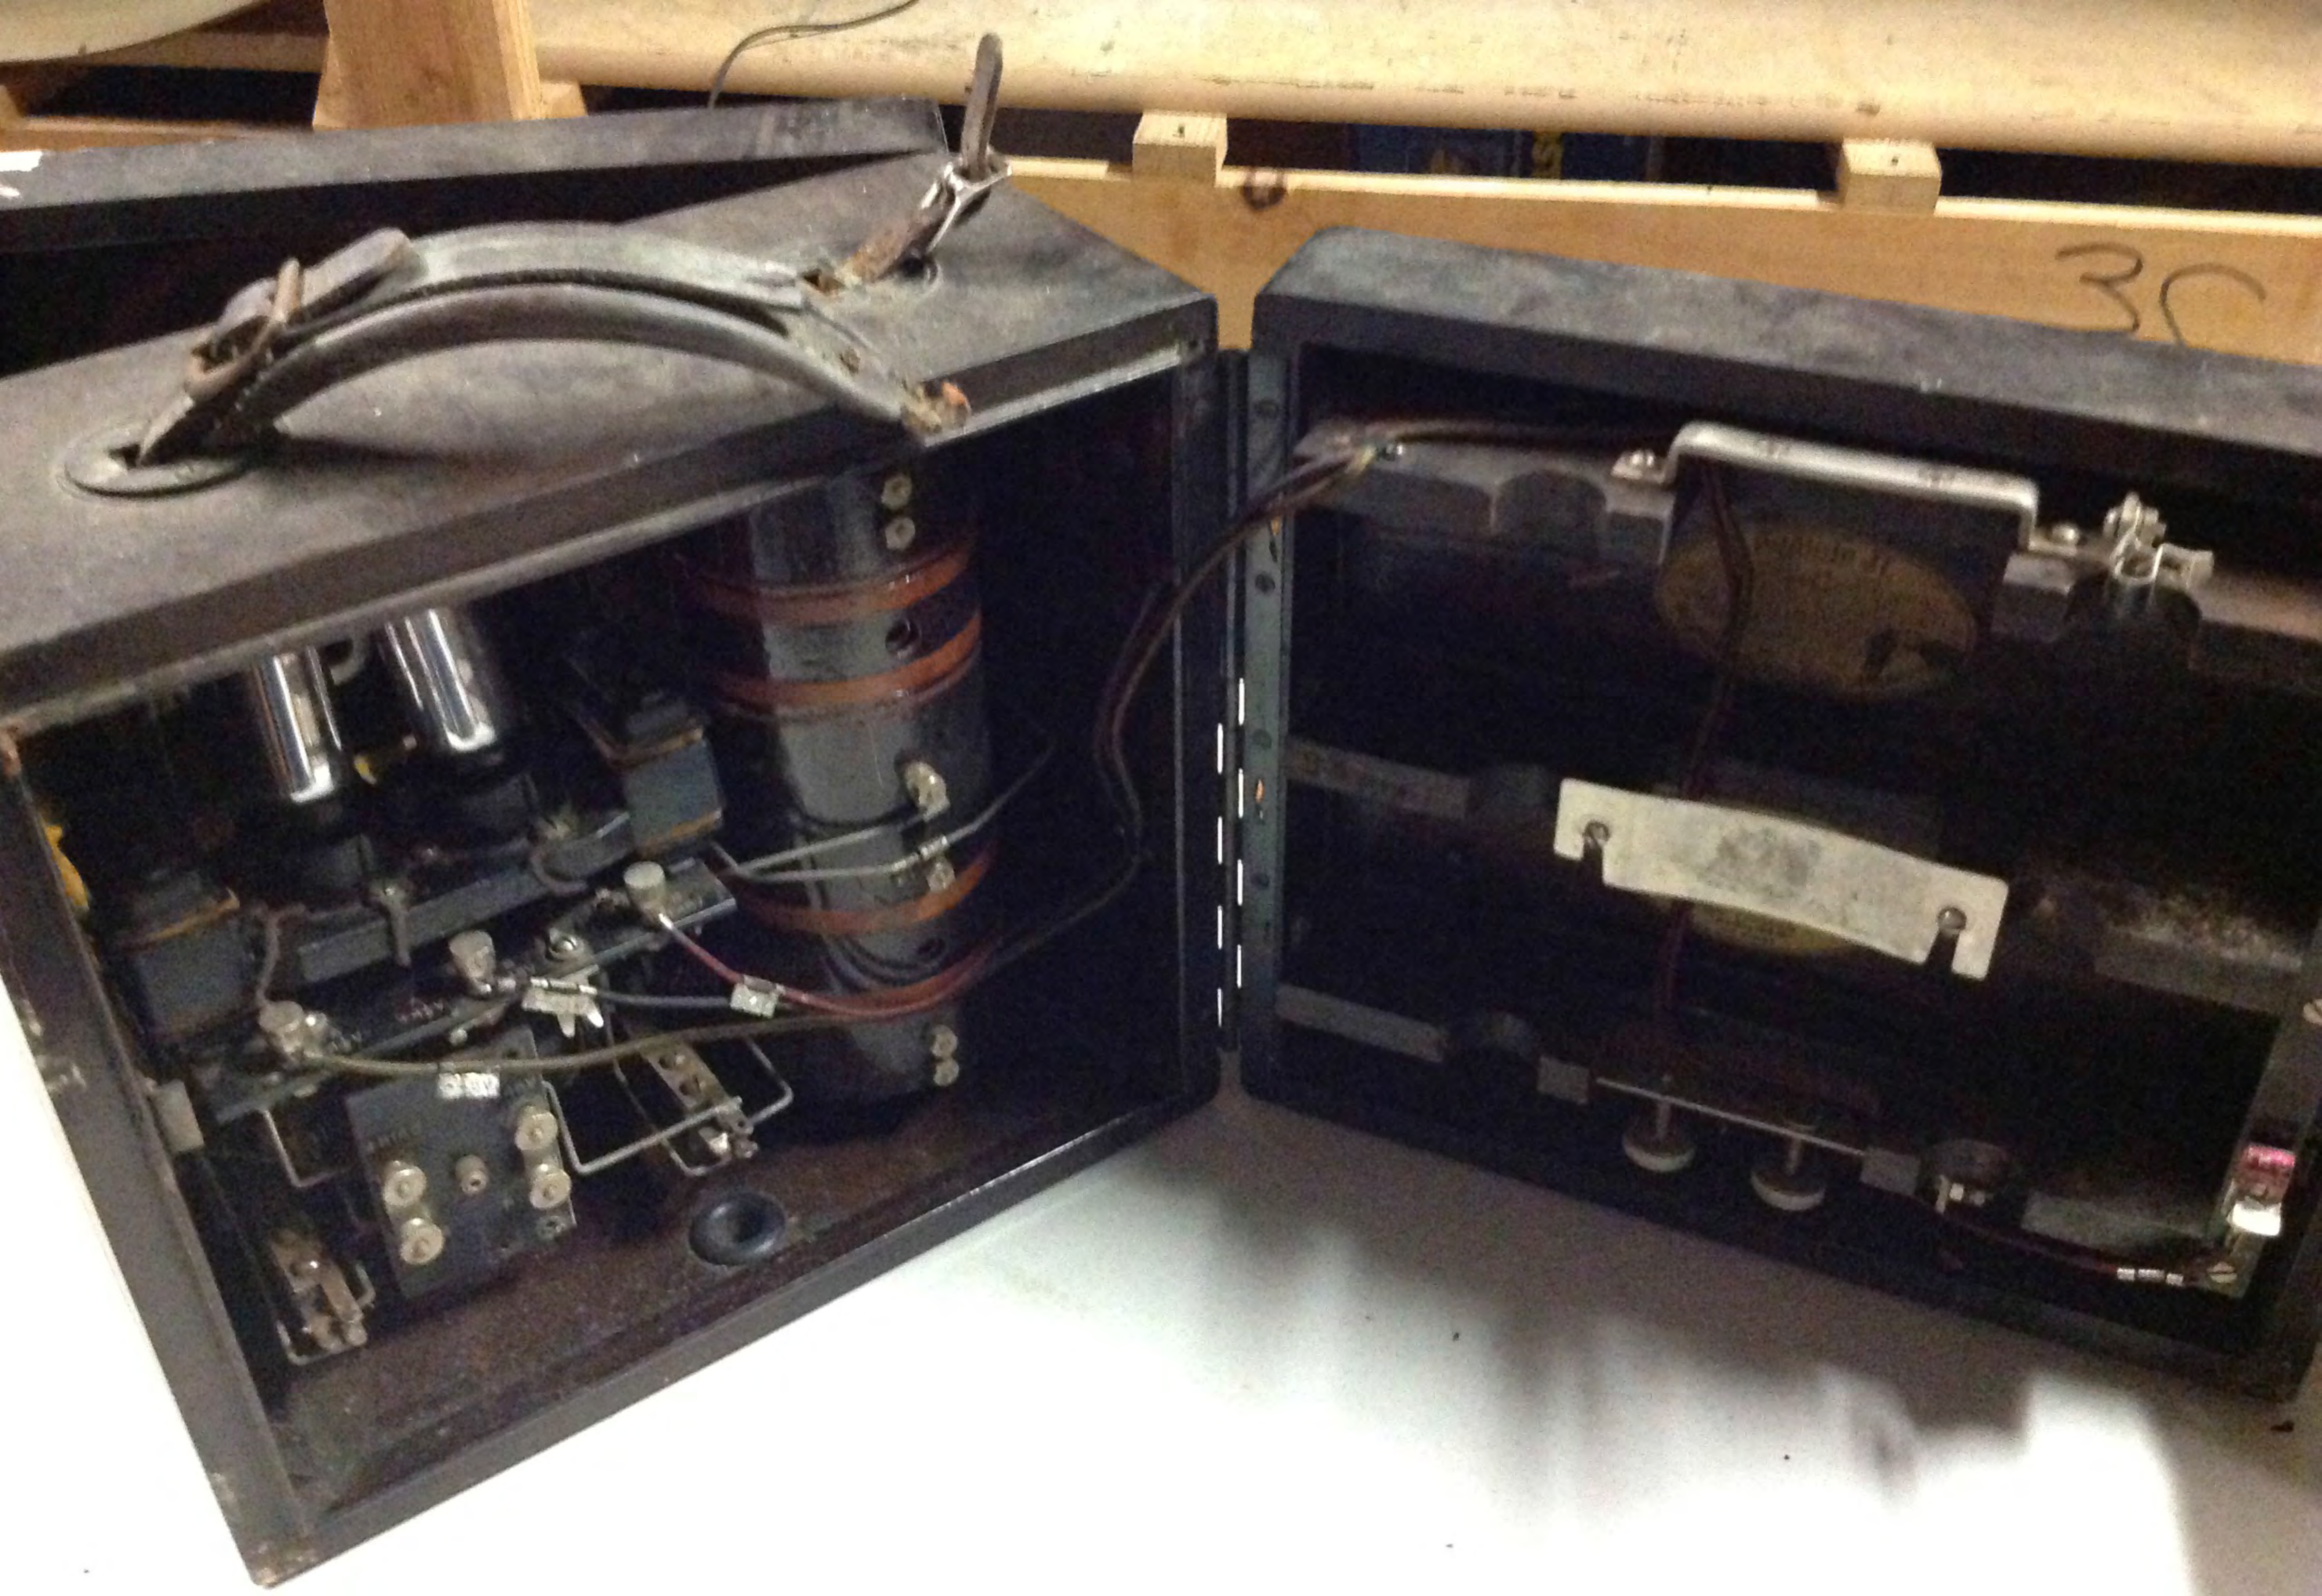

CONAR

EMERSON

SYSTEM OF AUTOMATIC SOUND MEASUREMENT

1000 HERTZ
4000 10



1000 HERTZ



1000 HERTZ



1000 HERTZ



1000 HERTZ





the hallicrafters co.

MODEL S-38C

TUNING



BAND SPREAD



A.M. SPEAKER



C.W. PHONES



BAND SELECTOR

VOLUME



OFF

RECEIVE



STAND BY







PHONO

A 051



Radiola
III-A





40 30 20 10 4 8

Central Scientific Co.
Chicago

.1 2 8 4 1 2

CONAR
instruments

DIVISION OF
NATIONAL RADIO INSTITUTE

SIGNAL GENERATOR

MODEL 280

170 KC TO 60 MC ON
FUNDAMENTALS



F 30 MC E 15 MC D 4.5 MC C 1.5 MC B 550 KC A 170 KC
A 550 KC B 1000 KC C 5.0 MC D 15 MC E 30 MC F 60 MC

HIGH
LOW

ATTENUATOR
OFF

BAND
A B C D E F

RF
MOD AUD



SOLAR

SOLAR MFG. CORP., NEW YORK

6E5

W



PER CENT
POWER FACTOR
AT 60 CYCLES



ELECTRO
LYNCH

PAPER
MICA



SERIAL NO.

11184

MADE IN U.S.A.

PATENT PENDING

CAPACITOR ANALYZER

TYPE VOLTS CYCLES

2-1-60 110 60

COND RES











W. & A. NUTT







30

DIAL LIGHTS

C.W. OSC.

ON
OFF

CRYSTAL
OUT IN

CRYSTAL
OUT IN

AVC OFF MVC

AVC OFF MVC

INCREASE VOL.

INCREASE VOL.

BEAT FREQ.

BEAT FREQ.

TUNING

TUNING

200-500
KC

200-500
KC

REAR PANEL
SPEAKER

WOODEN HANDLE



Motorola





ANTENNA

0 1 2 3 4 5 6 7 8 9 10

0 1 2 3 4 5 6 7 8 9 10

STATION SELECTOR



Radiola III







170 AMWA 55
150 130 110 90 70 65 60





SCALE

GOOD

GOOD

MICRONTA

BATTERY TESTER

22-030

9 V


15 V

27 V

LEWIS & CLARK COMPANY
Electrical Measuring Instruments
Philadelphia, Pa., U.S.A.



DIRECTION FOR
DOUBLE RANGE POTENTIOMETER THERMOMETER
NO. 8657-C

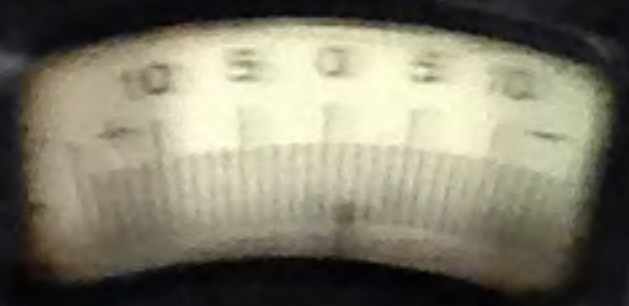

LEWIS & CLARK COMPANY
PHILADELPHIA, PA.

1005055

DOUBLE RANGE THERMOMETER
USES IRON-CONST THERMOCOUPLES
USES 1.5V BATTERY ϕ 20.00